

SMT-1930

18.5" Wide LED Monitor




Key Features

- Support up to 1360 x 768 resolution
- High contrast ratio 1000 : 1
- Fast response time 5ms
- 120Hz motion technology

Dimensions

Unit : mm (inch)

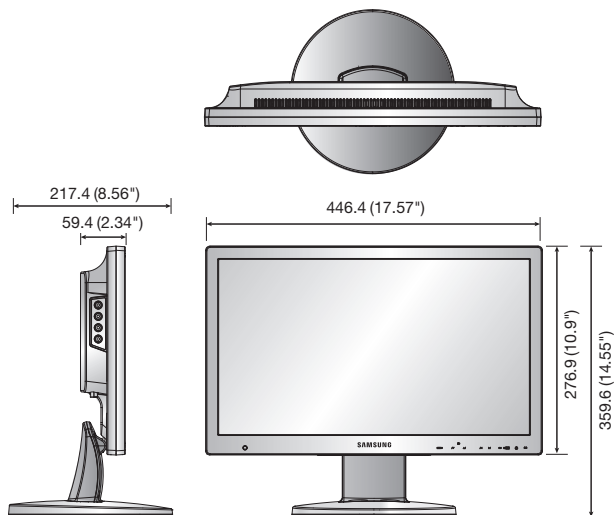

Technical Specifications

		SMT-1930	
DISPLAY			
Screen Size		18.5"	
Max. Resolution		1,360 x 768	
Brightness		250cd/m²	
Contrast Ratio		1,000 : 1	
Aspect Ratio		16 : 9	
Viewing Angle (H/V)		170° / 160°	
Display Color		16.7million	
Response Time		5ms	
Video System		NTSC / PAL	
Panel Life		50,000hours	
Filter Type		3D combfilter	
INTERFACE			
Video	Connector	BNC types (2 in / 2 out)	
	Connector	1 Analogue RGB 15-pin D-sub	
RGB / DVI	Input Signal	0.7 Vp-p ±5%	
	Available Format	640 x 350@70Hz	
		640 x 480@60Hz/67Hz/72Hz/75Hz	
		720 x 400@70Hz	
		720 x 576@60Hz	
		800 x 600@60Hz/72Hz/75Hz	
		832 x 624@75Hz	
HDMI	Available Format	1,024 x 768@60Hz/70Hz/75Hz	
		1,280 x 720@60Hz/70Hz/75Hz	
		1,360 x 768@60Hz	
		Connector	1 HDMI input (Type A connector)
		Available Format	640 x 480p@60Hz, 720 x 480i@60Hz
			720 x 480p@60Hz, 720 x 576i@50Hz
	Audio	Connector	2 RCA type (2 Stereo inputs)
Output Signal		Speakers : 2 x 1W	
Application Support		Remote controller	
ON SCREEN DISPLAY			
Functions		VESA™ DPM compatible	
Language		English, Spanish, French, German, Italian, Portuguese, Russian, Dutch, Danish, Swedish, Turkish, Chinese, Japanese, Thai, Korean, Arabic	
GENERAL			
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)	
	Power Consumption	Type 30W	
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)	
	Operating Humidity	20% ~ 90% (Non-condensing)	
Mechanical	Dimensions with Stand (WxHxD)	446.4 x 359.6 x 217.4mm (17.57" x 14.55" x 8.56")	
	Dimensions without Stand (WxHxD)	446.4 x 276.9 x 59.4mm (17.57" x 10.9" x 2.34")	
	Weight	4.7Kg (10.36 lb)	
	LCD Protection Glass	Yes	
	Cabinet Color	Black	
	Rack Mounts	Optional	
	VESA Mounts Interface	100 x 100mm	

* The latest product information / specification can be found at www.samsungsecurity.com