

SMT-2730

27" LED Monitor




Key Features

- Support up to 1,920 x 1,080 resolution
- Contrast ratio 1,000 : 1
- Fast response time 8ms
- Excellent picture quality with LED back light
- Video input : HDMI, VGA, Composite

Dimensions

Unit : mm (inch)

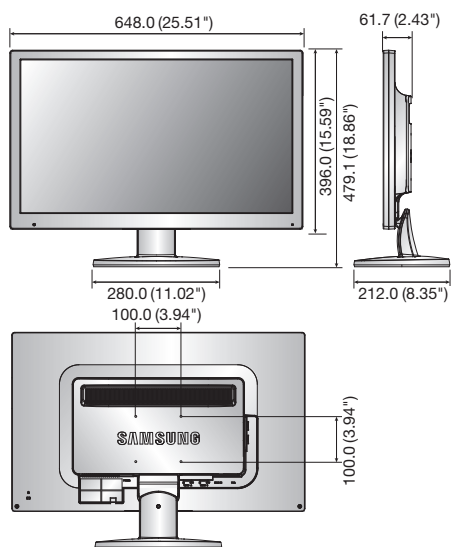

		SMT-2730
DISPLAY		
Type	LED	
Screen Size	27"	
Max. Resolution	1,920 x 1,080	
Brightness	300cd/m ²	
Contrast Ratio	1,000 : 1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	170° / 160°	
Display Color	16.7million	
Response Time	8ms (G to G)	
Video System	NTSC / PAL	
Panel Life	30,000hours	
Filter Type	3D combfilter	
INTERFACE		
Video	Connector	BNC type (2 in / 2 out), VGA, HDMI
	Connector	Analogue D-sub (15 pin)
	Input Signal	0.7Vpp ±5%
	RGB / DVI	Available Format
720 x 400@70Hz		
640 x 480@60Hz/72Hz/75Hz (VGA)		
800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)		
1,024 x 768@60Hz/70Hz/75Hz (XGA)		
1,152 x 864@75Hz		
1,152 x 870@75Hz		
1,280 x 960@60Hz		
1,280 x 1,024@60Hz/75Hz (SXGA)		
1,360 x 768@60Hz		
HDMI	Connector	HDMI
	Available Format	640 x 480p@60Hz, 720 x 480i@60Hz, 720 x 480p@60Hz 720 x 576i@50Hz, 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz 1,920 x 1,080i@50Hz/60Hz, 1,920 x 1,080p@50Hz/60Hz
Audio	Connector	RCA (L/R), Stereo mini jack
	Output Signal	Loop-through line level (PC only), Speakers : 2 x 1W
Application Support		Remote controller
ON SCREEN DISPLAY		
Functions		VESA™ DPM compatible
Language		English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Taiwanese, Chinese, Japanese, Korean, Dutch, Danish, Arabic
GENERAL		
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)
	Power Consumption	35W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	0% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	648.0 x 479.1 x 212.0mm (25.51" x 18.86" x 8.35")
	Dimensions without Stand (WxHxD)	648.0 x 396.0 x 61.7mm (25.51" x 15.59" x 2.43")
	Bezel Size	24.3mm (0.96")
	Weight	7.3Kg (16.09lb)
	Cabinet Color	Black
	Rack Mounts	Optional
VESA Mounts Interface		100 x 100mm (3.94" x 3.94")

* The latest product information / specification can be found at www.samsungsecurity.com