



IR Dome IR372

CCTV
IP (Network) Range



Features

Standard Features

- IP66 Rated
- Megapixel CMOS Sensor
- HD Resolution 1280 X 720
- Onvif Compliant
- TF Card slot (32gb)
- Multiple simultaneous streams
- 4mm - 9mm Varifocal lens

Enhanced Features

- Wi-Fi or P.O.E options
- WDR function
- Alarm on motion detection
- Microphone Input

Software

- ZKiVision Software
- ZK Access Control Management 3.5

Related Products



NVR



Software

Alternative Products



IP Cube



IP Bullet



IP Box



IP Mini Dome

Specifications

Camera Performance

- Image Sensor: 1/3" megapixel WDR CMOS
- Image Resolution: 1280 X 720
- Minimum Illumination: 0.1 Lux (IR off), 0 Lux (IR on)
- Day/Night mode: Automatic IR-cut filter
- Lens Type: 4mm - 9mm Varifocal
- IR Distance: 10m - 15m with 45° projection angle

Video

- Video Compression: H.264
- Video Resolution: Main - 1280 X 720
Secondary - 640 X 352
- Video Frame rate: PAL: 1 - 25 fps
- Image Settings: Brightness, contrast, saturation, shutter, WDR

Audio

- Audio Compression: G.726 / G.711
- Audio Streaming: Two-way
- Audio Input: 1 channel / Microphone input
- Audio Output: 1 channel output

Network

- Security: Multi-level user account access with password protection
- Network Interface: 10Base-T / 100Base-TX Ethernet interface
Wi-Fi 802.11b/g/n wireless network (optional)
- Supported Protocol: TCP/IP, HTTP, UDP, ARP, SMTP, FTP,
DHCP, DNS DDNS, NTP, UPNP, RTSP/
RTCP/RTP, ONVIF

Storage

- Card Slot: Supports TF card (max 32gb)
- Storage: Snapshots and video clips


Alarm & Event Management

- Alarm Input: 1 channel on/off alarm input (set NO/NC)
- Alarm Output: 1 channel on/off output
External Alarm: 120V AC 1A/24V DC 1A
- Motion Detection: 4 Independent detection areas
- RS485 Port: Yes
- Alarm Trigger: Motion Detection, External input
- Alarm Events: Alarm via Email server,
Upload video to FTP server, Save footage.

General

- Casing: Metal (Aluminium Alloy)
Colour: Dark Grey
- Power Supply: 12V DC 1.5A
P.O.E - 802.3af POE Standard (optional)
- Power Consumption: 10W max
- Working Conditions: -10°C - 55°C
- Protection Rating: IP66
- Weight: Net - 1.74kg
Gross - 2.5kg

Dimensions

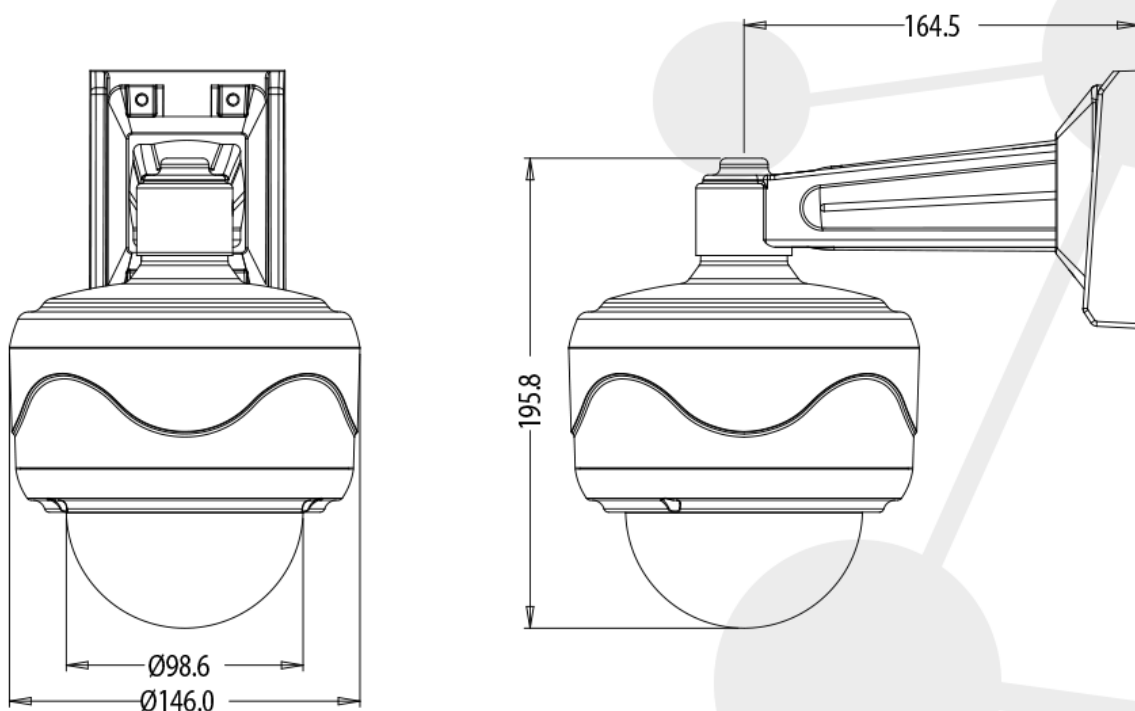

ZKTeco, ZKSoftware, ZKAccess, ZKiVision, ZKBiolock, ZKAFIS are either registered trademarks or trademarks of ZKTECO INC and ZKTeco South Africa.

You must obtain written and signed permission from ZKTECO before using any photograph owned or licenced by ZKTECO.

Copyright © 1998-2014 ZKTECO INC. All rights reserved.